



Rigitone® Edge Activ'Air® 8/18 Q

- > Square perforations arranged regularly across the whole surface
- > Excellent acoustic absorption
- > Improves the quality of internal air through Activ'Air® exclusive technology
- > Easy to install thanks to the chamfered edge

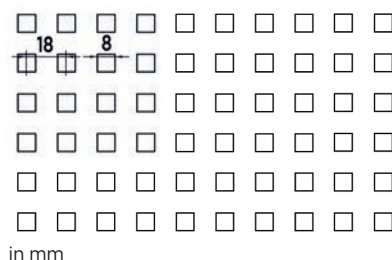

Material	gypsum
Acoustic tissue	black*
Edge type	chamfered (sanded and primed)
Surface	ready for painting
Format (mm)	1188 x 1998
Thickness (in mm)	12.5
Approx weight. (kg/sq)	10
Perforation (mm)	8 x 8 mm - cent. dist. = 18 mm
Perforation rate	19.8%

* White acoustic tissue on demand / Without acoustic tissue on demand.


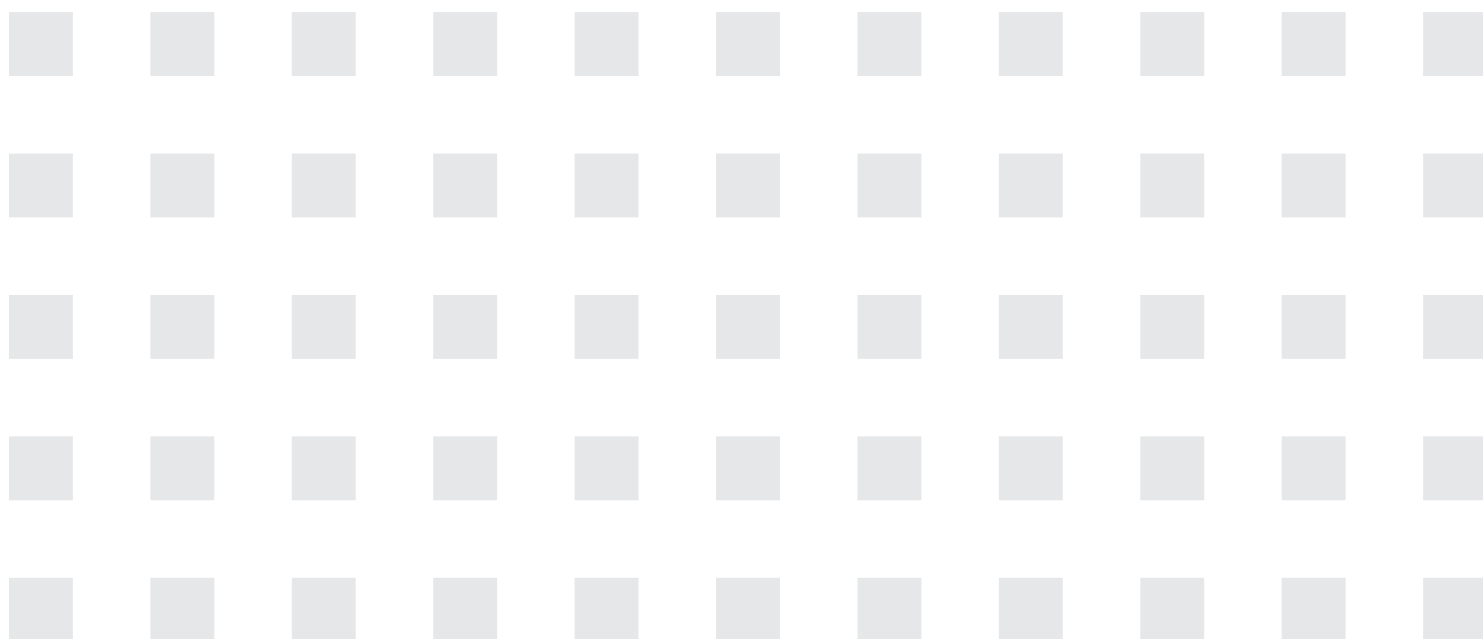


Rigitone® Edge Activ'Air® 8/18 Q



Recycling
certified

Sound
Absorption

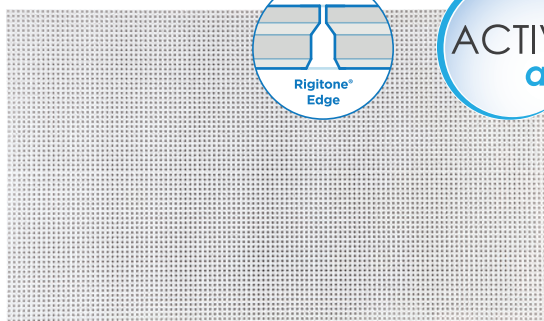

STANDARDS

- Rigitone® Edge Activ'Air® panels benefit from A+ classification for Internal Air Quality (Eurofins report in accordance with standards ISO16000).
- Rigitone® Edge Activ'Air® panels comply with standard NF EN 14190.

PERFORMANCES



Fire reaction: A2-s1, d0.




Behaviour in damp environment

Rigitone® Edge Activ'Air® panels may be used in rooms with low and medium relative humidity.



Acoustic behaviour

Acoustic absorption
(rock wool without vapour barrier).

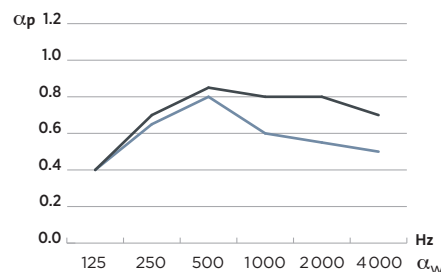

	125	250	500	1000	2000	4000	α_w
Plenum 200 mm / Wool 20 mm	0.40	0.70	0.85	0.80	0.80	0.70	0.80
Plenum 200 mm / Without wool	0.40	0.65	0.80	0.60	0.55	0.50	0.60